
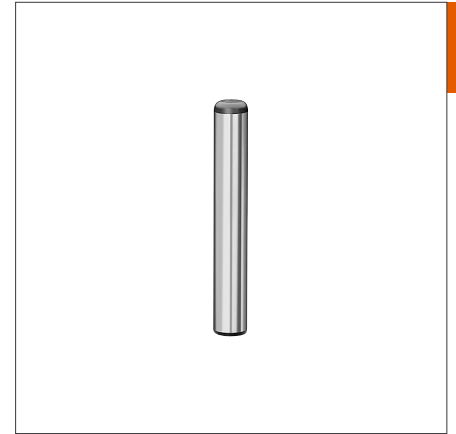


Z025 /...

Führungssäule, glatt
Straight guide pillar
Colonne de guidage, lisse

Mat.: 1.8159/62 ± 2 HRC
ISO 9182-2/DIN 9825-2

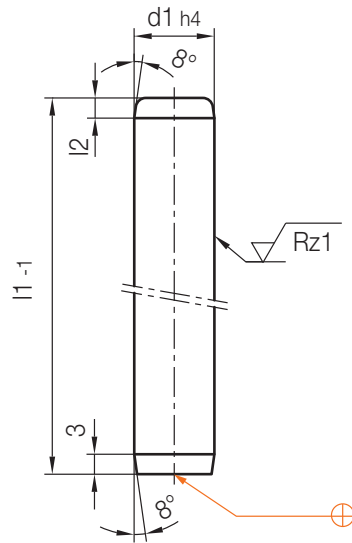



1

	Ø			Ø	
12	d1	l1	Nr./No.	d1	Nr./No.
3	11	80	Z025/11x 80	12	Z025/12x 80
		90	90		90
		100	100		100
		112	112		112
		125	125		125
		140	140		140
4	15	90	Z025/15x 90	16	Z025/16x 90
		100	100		100
		112	112		112
		125	125		125
		140	140		140
		160	160		160
		180	180		180
		200	200		200
	19	100	Z025/19x100	20	Z025/20x100
		112	112		112
		125	125		125
		140	140		140
		160	160		160
		180	180		180
6	24	100	Z025/24x100	25	Z025/25x100
		112	112		112
		125	125		125
		140	140		140
		160	160		160
		180	180		180
		200	200		200
		224	224		224
		250	250		250
		280	280		280
	30	125	Z025/30x125	32	Z025/32x125
		140	140		140

Z025 /...

Führungssäule, glatt
 Straight guide pillar
 Colonne de guidage, lisse

Mat.: 1.8159/62 ± 2 HRC
 ISO 9182-2/DIN 9825-2

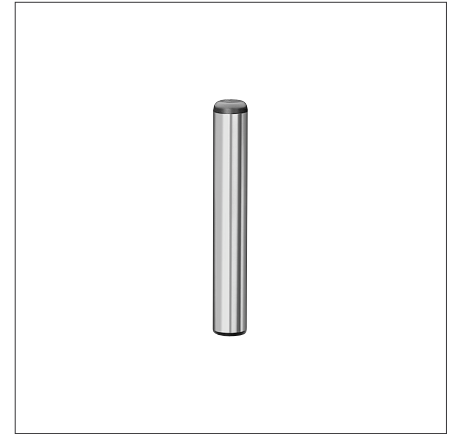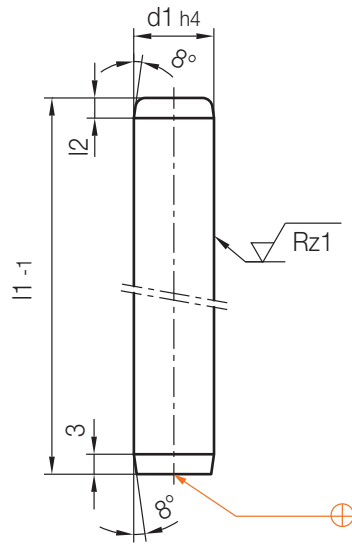

	Ø			Ø	
	d1	l1	Nr./No.	d1	Nr./No.
12	30	160	Z025/30x160	32	Z025/32x160
		180	180		180
		200	200		200
		224	224		224
		250	250		250
		280	280		280
		315	315		315
	38	160	Z025/38x160	40	Z025/40x160
		180	180		180
		200	200		200
		224	224		224
		250	250		250
		280	280		280
		315	315		315
8	48	180	Z025/48x180	50	Z025/50x180
		200	200		200
		224	224		224
		250	250		250
		280	280		280
		315	315		315
		355	355		355
		400	400		400
		450	450		450
		500	500		500
	60	250	Z025/60x250	63	Z025/63x250
		280	280		280
		315	315		315
		355	355		355
	400	400		400	
	450	450		450	
	500	500		500	