


Z257/5/...

Lehrenband
 Gauge strip
 Bande de calibrage


Mat.: 1.1274

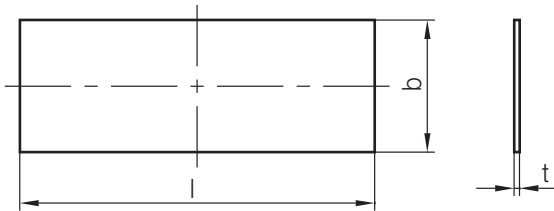

📦	Tol. t	Härte	Zugfestigkeit	b	Typ	t	l [mm]	Nr./No.
		Hardness	Tensile strength					
		Dureté	Résistance à la traction					
		[HRC]	N/mm ²					
10	± 0,005	55–58	2000–2200	50	5	0,03	300	Z257/5/0,03x300
	± 0,006					0,04		
	± 0,007	52–55	1800–2000			0,05		0,05
						0,06		0,06
	± 0,009	51–54	1700–1900			0,07		0,07
						0,08		0,08
	± 0,01	57–60	2100–2300			0,09		0,09
						0,1		0,1
	± 0,002	55–58	2000–2200			0,12		0,12
						0,15		0,15
	± 0,003					0,2		0,2
						0,25		0,25
						0,3		0,3
	± 0,004					0,4		0,4
						0,5		0,5

Z947/2/...

Montagegange
Mounting tube
Tige de montage

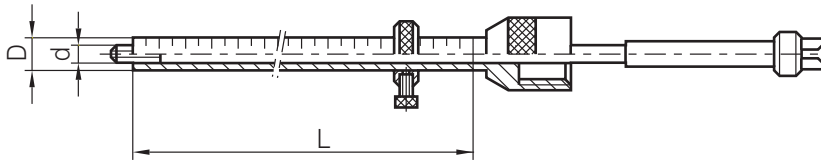


d	Typ	D	L	Nr./No.
M6	2	12	630	Z947/2/12x630
M8		15	250	15x250
		16	800	16x800

Z257/1/...

Lehrenband
Gauge strip
Bande de calibrage

Mat.: 1.1274

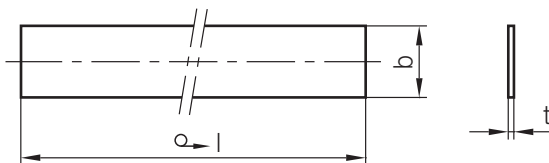

Tol. t	Härte Hardness Dureté	Zugfestigkeit Tensile strength Résistance à la traction	b	Typ	t	l [mm]	Nr./No.	
	[HRC]	N/mm ²						
± 0,004	55-58	2000-2200	12,7	1	0,01	5000	Z257/1/0,01x5000	
					0,02		0,02	
					0,03		0,03	
± 0,005	52-55	1800-2000	0,04	0,04				
± 0,006			0,05	0,05				
± 0,007			0,06	0,06				
± 0,009	51-54	1700-1900	0,07	0,07				
± 0,01			0,08	0,08				
			0,09	0,09				
± 0,002	57-60	2100-2300	12,7	1	0,1		2000	Z257/1/0,15x2000
	55-58	2000-2200			0,12			0,12
					0,15			0,15
± 0,003	55-58	2000-2200	0,2	0,2				
			0,25	0,25				
			0,3	0,3				
± 0,004	55-58	2000-2200	0,4	0,4	1000	Z257/1/0,4 x1000		
			0,5	0,5				